Li-ion Powered Pallet Truck



1 kg = 2.205 lb 1 inch = 25.4 mm

T-CBD15

1500

600

80

Ø210 x 70

Ø80 x 93 / Ø80 x 70

110

635 / 1200

1580 / 1650

430

550 / 685

53 x 160 x 1150 (1220)

550 / 685

2180 / 2250

2050 / 2085

1380 / 1450

4.3 / 4.5

24 / 20

5.5

114



• Ruyi handle with bully switch.

• were used out.

• Double fork roller

• High quality emergency switch (as key switch).

• Split rocker arm It makes the equable stress in order to keep the long-time using.

• Driving wheel with horizontal mounted motor, convenience to maintain. • External battery charger connector, can be charged separately even the battery





Model

Load capacity

Load centre distance

Tyre size (front)

Tyre size (rear)

Max. lift height

Overall length

Overall width

Turning radus

Battery weight

Fork height (lowered)

Length to face of forks

Width overall forks

Fork dimensions (SxExL)

Travel speed (laden / unladen)

Service weight (with battery)

* Option battery : 24V / 30Ah

Battery voltage, nominal capacity K5

Height of tiller in drive position min./max.

Aisle width for pallets 1000 x 1200 crossways

Aisle width for pallets 800 x 1200 lengthways



Q (kg)

mm

mm

C (mm)

h13 (mm)

h3 (mm)

h14 (mm)

L1 (mm)

L2 (mm)

b1 (mm)

b5 (mm)

Ast (mm)

Ast (mm)

Wa (mm)

Km/h

V/Ah

Κg

Kg


mm






Horizontal motor Entry roller

Option: wheel protection plate



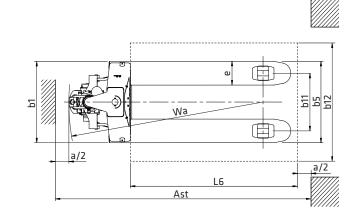



No. 5, Zili 1st Road, Nankang Industrial Zone, Nantou city 540, Taiwan R.O.C. TEL: +886-49-2263800 FAX: +886-49-2252919 Website: www.tailift.com DOC. S/N: DEBOOO Edition: 01 E-mail: insales@tailift.com.tw



• Single fork roller. Option: • Big battery capacity: 24V / 30Ah (LITHIUM) Entry roller