


Electric Pallet Truck

Model:
T-CBD15W-Lix

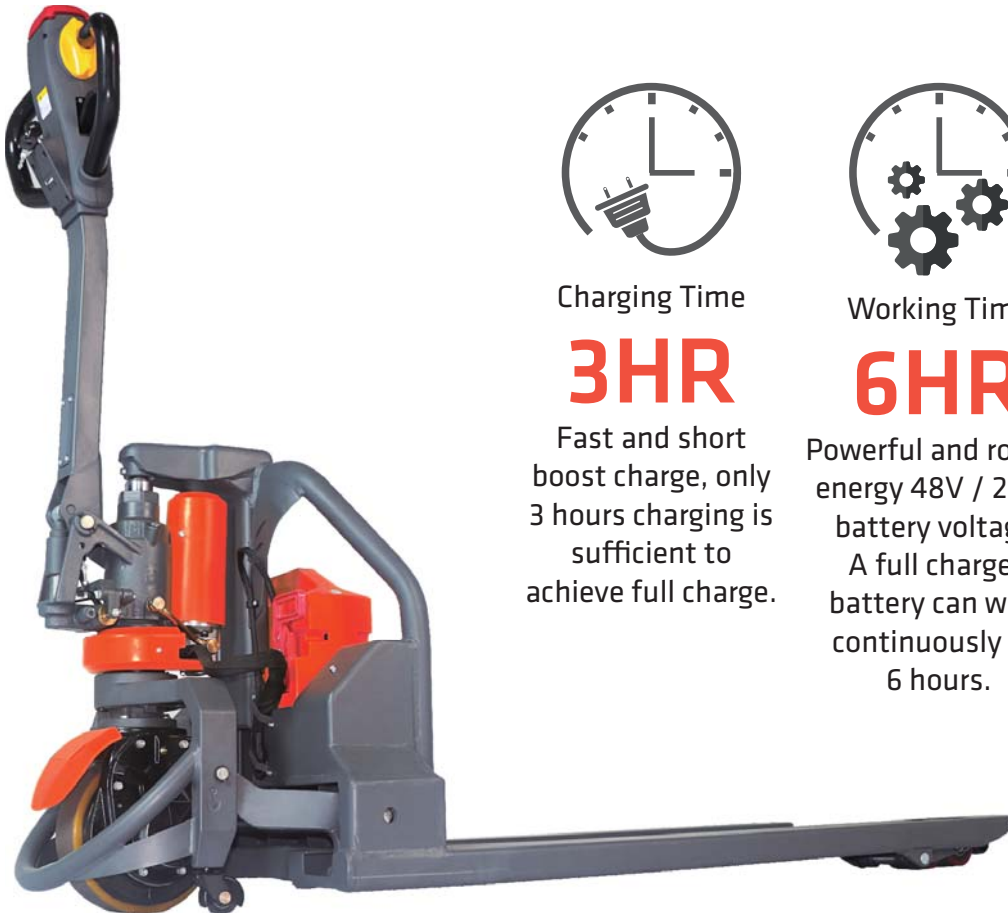

Charging Time

3HR

Fast and short boost charge, only 3 hours charging is sufficient to achieve full charge.



Working Time

6HR

Powerful and robust energy 48V / 20Ah battery voltage. A full charged battery can work continuously for 6 hours.



Work Shift

24HR

Prepare just two pieces of lithium batteries. One charging, one working, 24 hours without break.

- **Multi-function control handle**

Incorporates butterfly-style thumb controls, emergency reverse button, horn button and key switch for ease of use.

- **Ergonomic spring-loaded**

Steering handle with comfort grip for reduced operator fatigue.

- **Plug-in battery design**

Makes it easier to remove and change, no need additional tools or devices.

- **With EM brake offers regenerative braking**

- **Compact vehicle design**

Rugged and high-performing yet lightweight body provides exceptional maneuverability in tight areas.

- **Integrated rocker arm**

The rocker arm is casted in single piece, intensifying the strength and structure.

- **Less wiring, easy service**


Mechanical and electronic components are easy to change and service.

- **Brushless motor**

Equipped with horizontal type brushless driving motor and gear box, offers high drive speed and low torque output. Wheel can be independently dismantled.



1 kg = 2.205 lb 1 inch = 25.4 mm

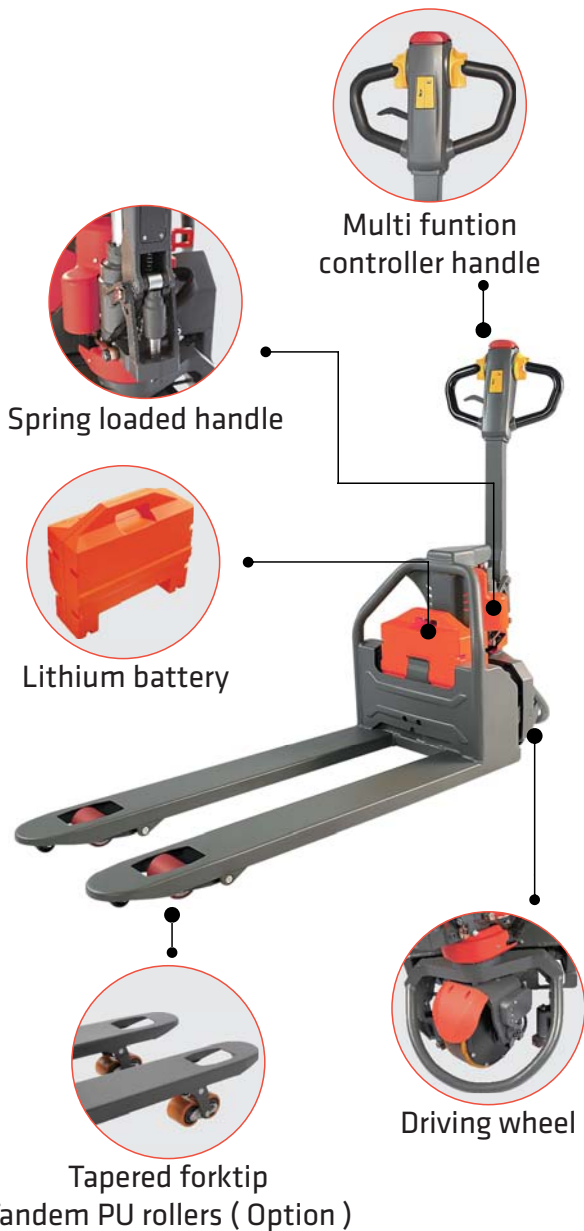

Model	T-CBD15W-Lix	
Load capacity	Q (kg)	1500
Load centre distance	C (mm)	600
Fork height (lowered)	h13 (mm)	80
Type size (front)	mm	Ø250
Type size (rear)	mm	Ø80
Wheels, number front rear (x = driven wheels)		1x2(4)
Max. lift height	h3 (mm)	110
Height of tiller in drive position min./max.	h14 (mm)	635 / 1200
Overall length	L1 (mm)	1623 / 1693
Length to face of forks	L2 (mm)	473
Overall width	b1 (mm)	550 / 685
Fork dimensions (S x E x L)	mm	45 x 160 x 1150 (1220)
Width overall forks	b5 (mm)	550 / 685
Aisle width for pallets 1000x1200 crossways	Ast (mm)	2226 / 2294
Aisle width for pallets 800x1200 lengthways	Ast (mm)	2095 / 2132
Turning radius	Wa (mm)	1424 / 1494
Travel speed (laden / unladen)	km/h	4 / 4.5
Max. gradeability (laden / unladen)	%	4 / 20
Battery voltage, nominal capacity K5	V / Ah	48 / 20
Battery weight	kg	8.5
Battery dimensions (L x W x H)	mm	340 x 130 x 307
Service weight (with battery)	kg	145

Remarks : T-CBD15W-Lix with horizontal drive motor & brake.

