

Electric Rider Stacker

Model:

T-CDDK10-III

T-CDDK12-III



T-CDDK15-III

AC

EPS

(Option)

Hot Sale

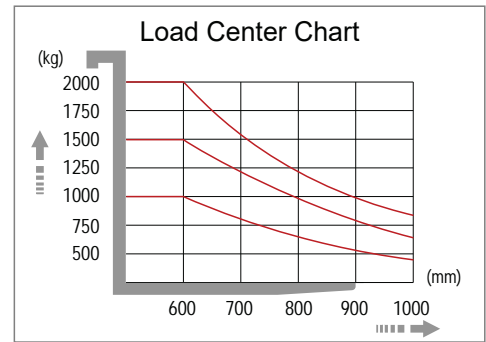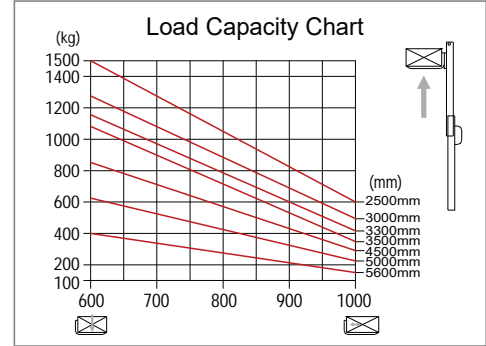

Model		T-CDDK10-III	T-CDDK12-III	T-CDDK15-III
Load capacity / rated load	Q (kg)	1000	1200	1500
Load centre distance	C (mm)	500	500	600
Load distance, centre of drive axle to fork	X (mm)	600	600	697
Fork height, lowered	h13 (mm)	90	90	90
Tyre size (front)	mm	Ø250 x 70	Ø250 x 70	Ø250 x 70
Tyre size (rear)	mm	Ø80 x 70	Ø80 x 70	Ø80 x 70
Additional wheels (dimensions)	mm	Ø150 x 60	Ø150 x 60	Ø150 x 60
Wheels, number front rear (x=driven wheels)		1x + 2 / 4	1x + 2 / 4	1x + 2 / 4
Height, mast lowered	h1 (mm)	2087 / 1837 / 2087 / 2237	2087 / 1837 / 2087 / 2237	2087 / 1837 / 2087 / 2237 / 2050 / 2210 / 2410
Free lift (option 2500 ~ 3000)	h2 (mm)	~	~	~ / 1570 / 1740 / 1940
Max. Lift height	h3 (mm)	1600 / 2500 / 3000 / 3300	1600 / 2500 / 3000 / 3300	1600 / 2500 / 3000 / 3300 / 4500 / 5000 / 5600
Height, mast extended	h4 (mm)	2087 / 3087 / 3587 / 3887	2087 / 3087 / 3587 / 3887	2087 / 3087 / 3587 / 3887 / 5030 / 5510 / 6110
Height of tiller in drive position min./max.	h14 (mm)	1150 / 1450	1150 / 1450	1150 / 1450
Overall length	L1 (mm)	1955	1955	2025
Length to face of forks	L2 (mm)	840	840	920
Overall width	b1 (mm)	850	850	850
Fork dimensions (S x E x L)	mm	60 x 170 x 1070	60 x 170 x 1070	60 x 170 x 1070
Width overall forks	b5 (mm)	570 / 695	570 / 695	570 / 695
Aisle width for pallets 800x1200 lengthways	Ast (mm)	2440	2440	2520
Turning radius	Wa (mm)	1575	1575	1655
Travel speed (laden / unladen)	km/h	7 / 7.1	7 / 7.1	7 / 7.1
Lift speed (laden / unladen)	mm/s	110 / 170	100 / 160	90 / 160
Lowering speed (laden / unladen)	mm/s	150 / 160	150 / 160	150 / 160
Battery voltage, nominal capacity K5	V/Ah	24 / 120	24/120	24 / 200
Battery weight	kg	90	90	160
Battery dimensions (L x W x H)	mm	753 x 178 x 240	753 x 178 x 240	800 x 254 x 320
Service weight (with battery)	kg	700 / 750 / 780 / 800	800 / 850 / 870 / 890	840 / 920 / 930 / 945 / 1510 / 1550 / 1570

*Option : (1) With EPS the drive wheel size is 250x80mm (2) Lithium battery 24V/225Ah



Conforms to EN ISO3691-1
EN1175-1
EN16307-1
Based on Directive 2006/42/EC
Conform to EN Standard 12895
Based on directive: 2014/30/EU (EMC)

